


Houses four down hole gauges

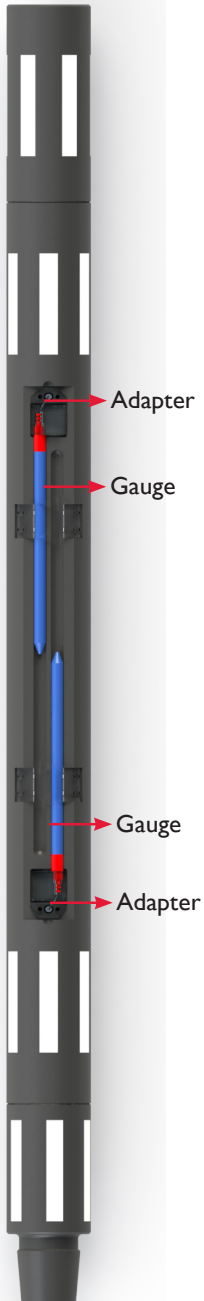

APPLICATIONS:

- Operations where down hole pressure and temperature data is required

FEATURES:

- One to four gauges
- Can record Internal (tubing) or external (annulus) conditions with each gauge
- Quartz or Piezo gauges

SPECIFICATIONS:

STANDARD GAUGE DIAMETER in [mm]	0.75 [19.05]
O.D. in [mm]	5.0 [127]
I.D. in [mm]	2.25 [57]
LENGTH in [m]	52 [1.33] - 89 [2.27]
WEIGHT lb [kg]	293 [133] - 345 [156]
MAX TEMPERATURE degF [degC]	350 [177]
PRESSURE DIFFERENTIAL (annulus/tubing) psi [kPa]	15,000 [103,421]
TENSILE STRENGTH lbs [kg]	380,000 [172,365]
CONNECTIONS (premium connections available)	3-1/2 API IF
SERVICE	Sour service above 175 degF as per NACE MR 0175

* Slim hole version available upon request.